



## DAMPER ACTUATORS, 2-, 3- POINT AND PROPORTIONAL CONTROL (4 Nm)

**DAN, DMN**

### FUNCTION

2- and 3- point or proportional damper control.

### APPLICATIONS

Well-suited for applications with small dampers (up to 0.8 m<sup>2</sup>) in ventilation and air handling units.

### FEATURES

- universal adapter for easy mounting
- shaft dimensions Ø 10...16 mm / 10...12 mm square
- minimum shaft length 50 mm
- anti-rotation bracket
- manual override with push-button
- direction of rotation selectable
- angle of rotation adjustable
- 2 microswitches SPDT
- power saving at end stops

TYPE	POWER SUPPLY	SIGNAL CONTROL
DAN24	24 Vac/dc	2-, 3- point
DAN230	230 Vac	2-, 3- point
DMN24	24 Vac/dc	0...10V dc

### Optional:

**S** with 2 auxiliary switches (not for DMN24)


Actuator		DAN24	DAN230	DMN24
Damper area (*)	m <sup>2</sup>	1	1	1
Torque	Nm	4	4	4
Power supply		24 Vac/Vdc	230 Vac	24 Vac/Vdc
Frequency	Hz	50...60	50...60	50...60
Power consumption				
- operating	W	2.5	4.0	2.5
- at end stops	W	0.85	3.0	0.85
For wire sizing	VA	4.1	5.0	4.1
Stroke time	s	35	35	35
Weight	g	900	1000	900
Control signal		2-, 3- point	2-, 3- point	0...10 Vdc
Aux. switch rating		3(1.5) A / AC 230 V	3(1.5) A / AC 230 V	-
Rotation angle:				
- operating		90°	90°	90°
- limitation		5...85° with 5° steps	5...85° with 5° steps	5...85° with 5° steps
Protection class		III	II	
Degree of protection		IP54	IP54	IP54
Room temperature		-20 ... +50 °C	-20 ... +50 °C	-20 ... +50 °C
Room humidity		5...95% r.h.	5...95% r.h.	5...95% r.h.
Maintenance		free	free	free
Standards		CE	CE	CE

(\*) the indication of the damper area is not significant, the data that must be taken into account is the value of the torque in N.m





# DAMPER ACTUATORS, 2-, 3- POINT AND PROPORTIONAL CONTROL (4 Nm)

DAN , DMN

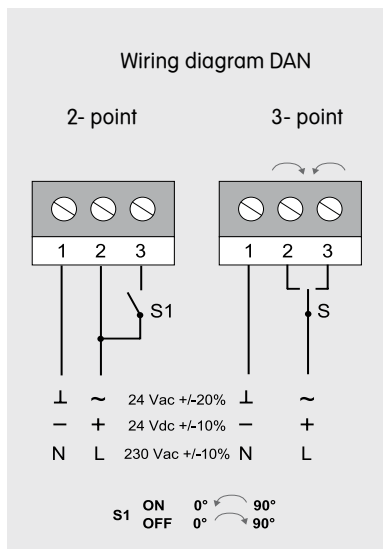



## Direction of rotation setting

The direction of rotation can be changed by reversing jumper J1.

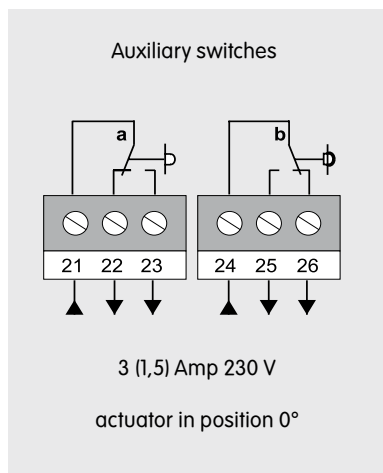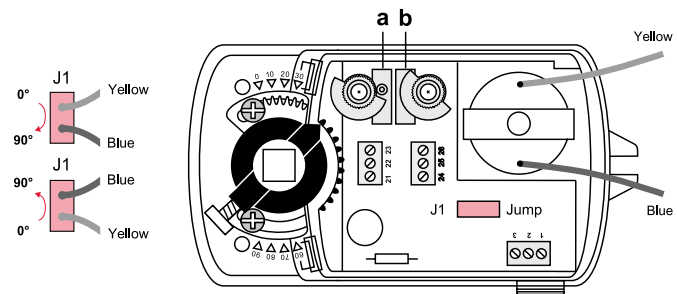


## Auxiliary switches setting

Factory setting:  
 switch a at 10°  
 switch b at 80°  
 The switching position can be changed manually.

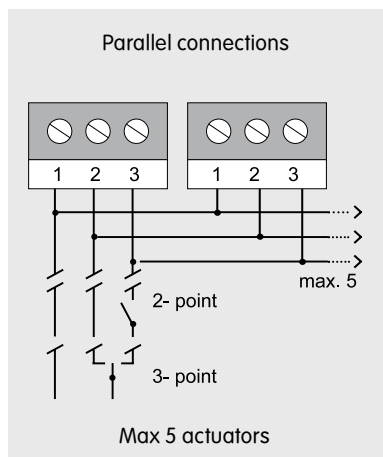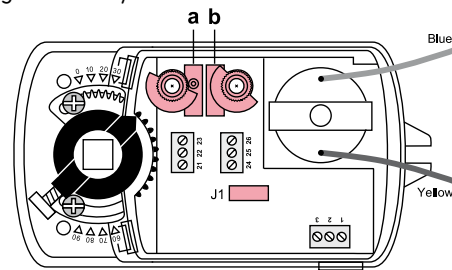


## Limitation of rotation angle

The range of working angle (90°) can be reduced up to 30° from each end stop by screw 1 and 2.

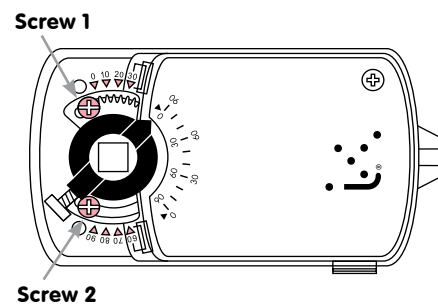


# DAMPER ACTUATORS, 2-, 3- POINT AND PROPORTIONAL CONTROL (4 Nm)

DAN, DMN

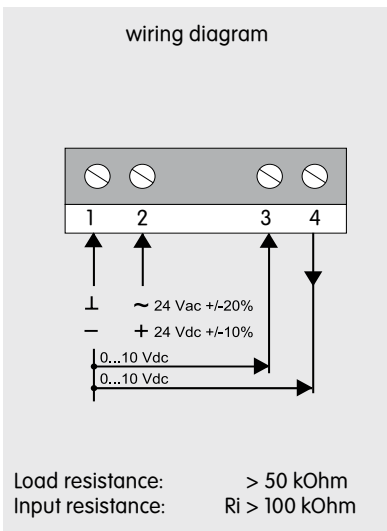


DMN

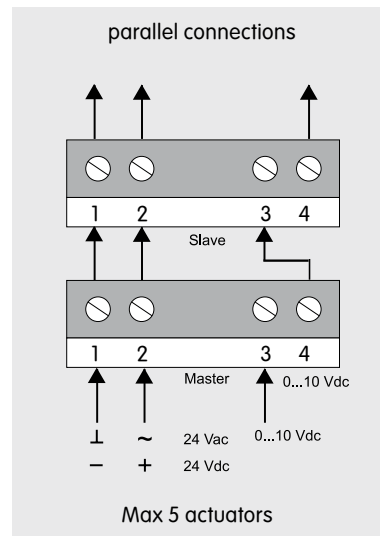

DMN

## Direction of rotation setting for DMN

R = factory setting

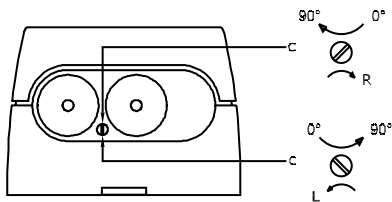

## DIMENSIONS (mm)

